


Efficient conversion of hemicellulose into high-value product and electric power by enzyme-engineered bacterial consortia

Description

As an abundant agricultural and forestry biomass resource, hemicelluloses are hard to effectively degrade and utilize by microorganisms due to the constraints of membrane and metabolic regulations. The authors report a synthetic extracellular metabolic pathway with hemicellulose-degrading enzymes controllably displayed on *Escherichia coli* surface as engineered bacterial consortia members for efficiently utilising xylan, the most abundant component in hemicellulose. Further, they develop a hemicellulose/O₂ microbial fuel cell (MFC) configuring of enzyme-engineered bacterial consortia-based anode and bacterial-displayed laccase-based biocathode. The optimized MFC exhibited an open-circuit voltage of 0.71 V and a maximum power density (P_{max}) of $174.33 \pm 4.56 \text{ mW cm}^{-2}$. Meanwhile, 46.6% (w/w) L-ketoglutarate was produced in this hemicellulose fed-MFC. Besides, the MFC retained over 95% of the P_{max} during 6 days' operation. Therefore, this work establishes an effective and sustainable one-pot process for catalyzing renewable biomass into high-value products and electricity in an environmentally-friendly way.

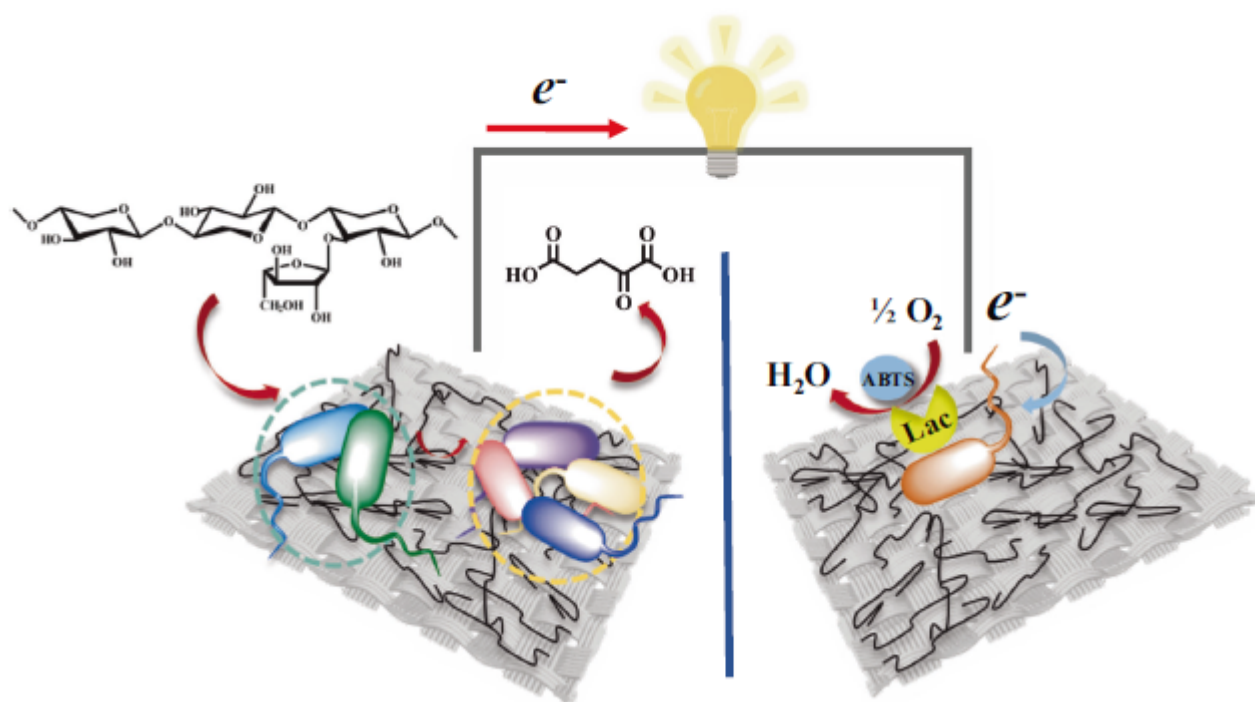

Schematic drawing of electron transfer route and catalytic reactions in the proposed two-compartment xylan/ O_2 MFC. The system was composed of the enzyme-engineered bacterial consortia-based bioanode and *E. coli*-Lac-based biocathode

Category

1. News